

STUDDABLE WINTER SUV & LIGHT TRUCK

Studdable



CHAMPRO IcePro SUV / IcePro 2

Designed to provide excellent grip and handling in extreme winter weather conditions.



15 - 19 Inch

Speed Rating: Q / T / H

50 - 75 Series

M + S


Features

Benefits

- Innovative studdable design > Reliable in extreme weather conditions
- Specially designed stud distribution > Enhances grip and reduces noise levels
- Wide groove tread design > Effectively removes slush and ice from the contact area
- Silica compound > Enhances ice performance and snow traction

CHAMPIRO IcePro SUV / IcePro 2

STUDDABLE WINTER SUV & LIGHT TRUCK

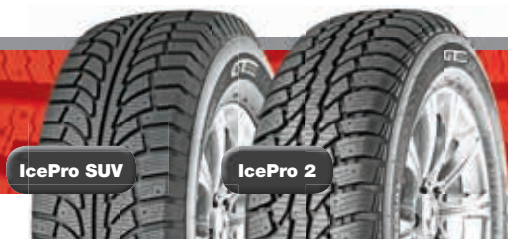

Tire Size	LI / SR	Item Number	Measuring Rim	Rim Width Range	Max. Load		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Weight		Side Wall
			inch	inch	lbs	kg	psi	kpa	32 nd	mm	inch	mm	inch	mm	lbs	kg	
CHAMPIRO IcePro SUV																	
215/70R15	98T	100A183	6.5	6.0 - 7.0	1653	750	44	300	13	10.2	26.9	683	8.7	221	28.9	13.1	BSW
235/65R16	103T	100A1671	7.0	6.5 - 8.5	1929	875	44	300	13	10.2	28.0	712	9.4	240	29.8	13.5	BSW
215/70R16	100T	100A178	6.5	6.0 - 7.0	1764	800	44	300	13	10.2	27.9	708	8.7	221	30.8	14.0	BSW
225/70R16	103T	100A176	6.5	6.0 - 7.0	1929	875	44	300	13	10.2	28.4	722	9.0	228	32.2	14.6	BSW
235/70R16	106T	100A177	7.0	6.5 - 7.5	2094	950	44	300	13	10.2	29.0	736	9.4	240	34.6	15.7	BSW
245/70R16	107H	100A1783	7.0	6.5 - 8.0	2149	975	44	300	13	10.2	29.5	750	9.8	248	31.8	14.4	BSW
265/70R16	112T	100A1991	8.0	7.0 - 9.0	2469	1120	44	300	13	10.2	30.6	778	10.7	272	36.5	16.6	BSW
225/75R16	108H XL	100A1784	6.0	6.0 - 7.5	2205	1000	50	340	13	10.2	29.3	744	8.8	223	29.1	13.2	BSW
245/75R16	111H	100A1785	7.0	6.5 - 8.0	2403	1090	44	300	13	10.2	30.5	774	9.8	248	33.9	15.4	BSW
235/55R17	99H	100A1780	7.5	6.5 - 8.5	1709	775	44	300	13	10.2	27.2	690	9.6	245	28.9	13.1	BSW
225/65R17	102T	100A1682	6.5	6.0 - 8.0	1874	850	44	300	13	10.2	28.5	724	9.0	228	30.1	13.7	BSW
235/65R17	108T XL	100A1992	7.0	6.5 - 8.5	2205	1000	50	340	13	10.2	29.1	738	9.4	240	32.7	14.8	BSW
245/65R17	107T	100A1674	7.0	6.5 - 8.5	2149	975	44	300	13	10.2	29.5	750	9.8	248	33.1	15.0	BSW
265/65R17	112T	100A1993	8.0	7.5 - 9.5	2469	1120	44	300	13	10.2	30.6	776	10.7	272	37.2	16.9	BSW
245/70R17	110T	100A179	7.0	6.5 - 7.5	2337	1060	44	300	13	10.2	30.6	776	9.8	248	37.1	16.8	BSW
265/70R17	115T	100A180	8.0	7.5 - 8.5	2679	1215	44	300	13	10.2	31.7	804	10.7	272	42.7	19.4	BSW
235/55R18	100H	100A1781	7.5	6.5 - 8.5	1764	800	44	300	13	10.2	28.1	715	9.6	245	30.2	13.7	BSW
255/55R18	109T XL	100A1672	8.0	7.0 - 9.0	2271	1030	50	340	13	10.2	29.0	737	10.4	265	33.8	15.3	BSW
235/60R18	107T XL	100A1673	7.0	6.5 - 8.0	2149	975	50	340	13	10.2	29.1	739	9.4	240	31.2	14.2	BSW
245/60R18	105T	100A182	7.0	7.5 - 8.5	2039	925	44	300	13	10.2	29.6	751	9.8	248	34.7	15.7	BSW
235/65R18	106H	100A1782	7.0	6.5 - 8.5	2094	950	44	300	13	10.2	30.0	763	9.4	240	32.4	14.7	BSW
275/65R18	116T	100A181	8.0	7.5 - 9.0	2756	1250	44	300	13	10.2	32.1	815	11.0	279	44.3	20.1	BSW
255/50R19	103T	100A1994	8.0	7.0 - 9.0	1929	875	44	300	13	10.2	29.1	739	10.4	265	33.3	15.1	BSW

LI Load Index SR Speed Rating XL Extra Load BSW Black Side Wall

Tire Size	LI / SR (s/d)	Load Range	Item Number	Measuring Rim	Rim Width Range	Max. Load (s/d)		Max. Pressure		Tread Depth		Overall Diameter		Section Width		Weight		Side Wall
				inch	inch	lbs	kg	psi	kpa	32 nd	mm	inch	mm	inch	mm	lbs	kg	
CHAMPIRO IcePro 2																		
LT225/75R16	115/112Q	E	100A1012	6.0	6.0 - 7.0	2680/2470	1215/1120	80	550	17	13.4	29.3	744	8.8	223	39.2	17.8	BSW
LT245/75R16	120/116Q	E	100A214	7.0	6.5 - 7.5	3042/2778	1380/1260	80	550	17	13.4	30.7	780	9.8	248	43.8	19.9	BSW
LT245/70R17	119/116Q	E	100A1013	7.0	6.5 - 8.0	3000/2755	1360/1250	80	550	17	13.4	30.6	776	9.8	248	44.4	20.1	BSW
LT265/70R17	121/118Q	E	100A1014	8.0	7.5 - 8.5	3195/2910	1450/1320	80	550	17	13.4	31.7	804	10.7	272	48.1	21.8	BSW
LT275/65R18	123/120Q	E	100A1015	8.0	7.5 - 9.0	3415/3085	1550/1400	80	550	17	13.4	32.1	815	11.0	279	50.3	22.8	BSW

LI Load Index SR Speed Rating (s/d) Single/Dual BSW Black Side Wall